



APEX CANOPY FASTENING

NOT TO SCALE

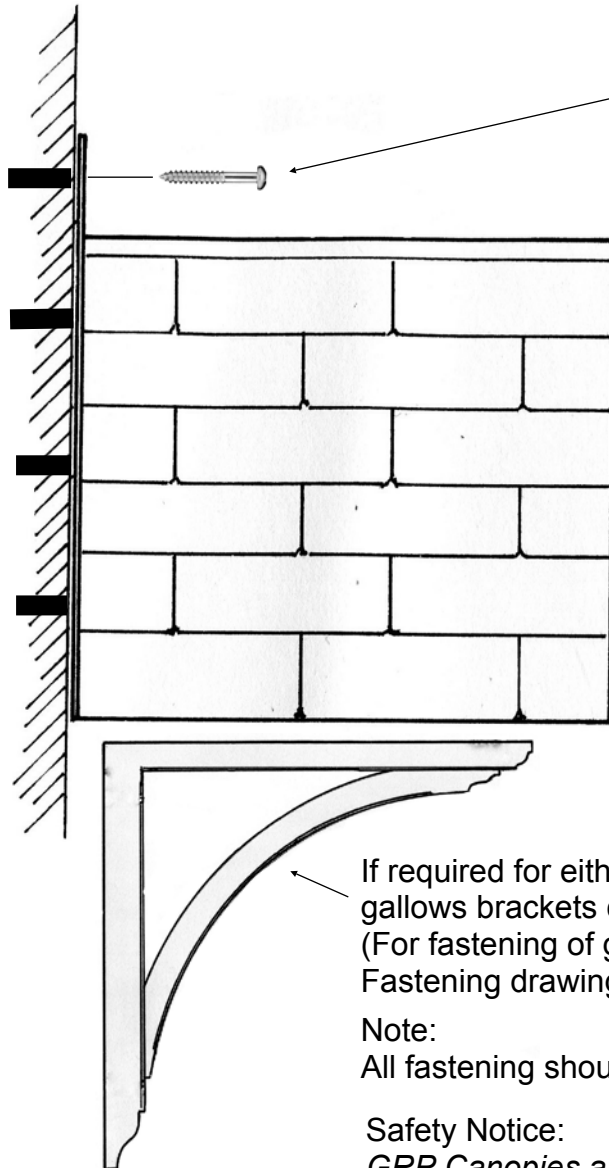

Apex canopies are normally fastened to the wall by fastening thru the GRP flange, using 65mm 10gauge (preferably stainless steel) screws at 300mm centres into suitable wall plugs and should then be finished with a lead flashing

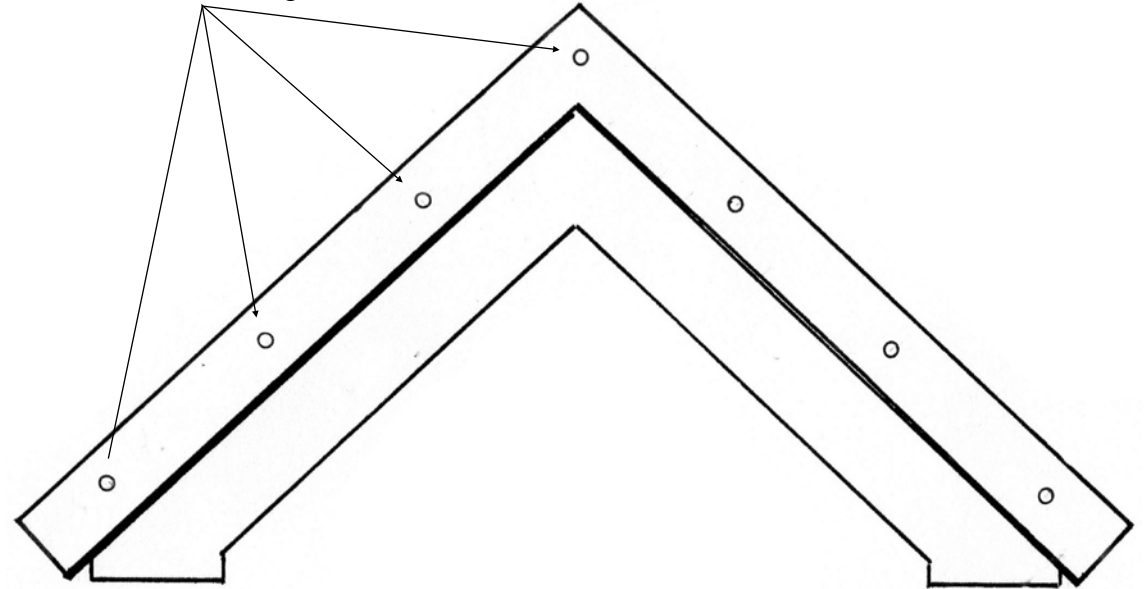

If required for either appearance or added support gallows brackets can be fitted to each side of the canopy. (For fastening of gallows brackets, see Gallows Bracket Fastening drawing)

Note:

All fastening should be done prior to the fitting of flashing

Safety Notice:

GRP Canopies are both functional and decorative, but they are NOT designed to be stood upon in any circumstance!

Man Friday (South West) Ltd

5 Marsh End, Lords Meadow,
CREDITON, Devon, EX17 1DN

E-mail: info@manfriday.co.uk
Web: www.manfriday.co.uk

Tel 01363 776622